



Moyne-Roberts

Standalone Fire Alarm



These temporary fire alarms come in two versions:

One with a “mushroom” push button - **MR20632**

One with a call point - **MR20631**

The push button version can be activated and reset by any user.


The call point version needs to be reset with a special call point key.

Up to 5 of these units can be linked to allow simultaneous sounder/strobe activation on operation of any of the call points or mushroom buttons.

Please note: Opening the alarm units to connect the battery with the red connection plug is required before installation. Test using test key (call point version) or mushroom button (push button version) before use.

ALARM INTERCONNECTIONS

To link the alarms (up to 5 units), connect all the ST- terminals together, and then link all the SW+ terminals together.

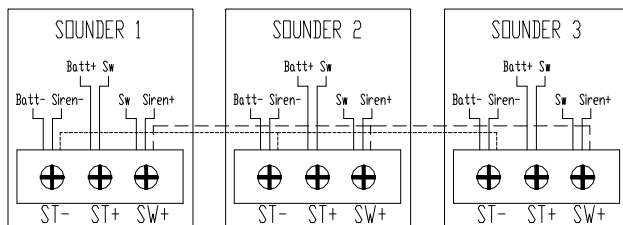

MODEL	Push Button	Call Point
Part No.	MR20632	MR20631
Operating Voltage	8 x 1.5V AA batteries (12V dc)	
Quiescent Current	0µA	
Alarm Output	95dB @ 1M	
Strobe Colour	Red	
Operating Temp °C	-10°C to +50°C	
Minimum Continuous Temp °C	0°C	
Maximum Humidity	95% RH Non Condensing	
Alarm Condition	Mushroom Button	Call Point
IP Rating	IP43	
Size mm, WxHxD	190x330x105	190x330x95
Weight	1035g	1080g

MOYNE-ROBERTS IRELAND LTD
 MOYNEHALL
 CAVAN
 IRELAND
 TEL: 049 4371482 FAX: 049 4361159
 E-MAIL: irl@moyneroberts.com

WALKER FIRE (UK) LTD
 2 ROMAN COURT
 PRESTON
 LANCASHIRE
 UK
 PR2 5BB
 TEL: 01772 693777 FAX: 01772 693760
 E-MAIL: uk@walkerfire.com

SMEBA BRANDBEVEILIGING
 BIJSTERHUIZEN 2028
 6604 LJ WIJCHEN
 NEDERLANDS
 TEL: (024) 377 54 58 FAX: (024) 378 62 85
 E-MAIL: info@smeba.nl